

OTW 42x72 - 42" WATER FILLED JERSEY BARRICADE

OVERVIEW & SPECIFICATIONS

- Same-day quotes
- 99% on-time fulfillment
- Lock in pricing for 60 days
- Made in the USA



OTW SAFETY

otwsafety.com

OTW 42x72 - 42” LCD BARRICADE

GSA Schedule

GSA MAS Contract: GS-03F-005BA · SIN: 339999S

OVERVIEW & SPECIFICATIONS

The OTW 42x72 - 42" Water Filled Jersey Barricade is a crash-tested, LCD (Longitudinal Channelizing Device) plastic barricade used to channelize traffic and separate vehicles, pedestrians, and work zones. Its 42-inch Jersey-profile body is available in blow-molded and rotationally molded polyethylene versions. Lightweight when empty and ballasted after placement, it forms continuous temporary barrier lines for a wide variety of applications.




FEATURES & BENEFITS

- NCHRP-350 crash tested and accepted at TL-3 as a Longitudinal Channelizing Device (MUTCD 6K.10, TTI Report 0-6103-1)
- 42 in tall, for a stronger physical and visual deterrent
- Interlocking "J-Hook" design
- Lightweight, at 75 lb empty, so two people can position units by hand and ballast with water on site
- UV-resistant for impact strength, color retention, and repeated-use durability
- Supports the OTW Barricade Fence Panel and OTW Vehicle & Pedestrian Gate Kits
- One-year manufacturing defect warranty

TECHNICAL SPECIFICATIONS

Height	42 in / 106.68 cm
Length	72 in / 182.88 cm
Width	24 in / 60.96 cm
Empty Weight	75 lb / 34.01 kg
LCD Ballast Weight	170 lb / 77.1 kg (10.8 US gal / 40.9 L of water, the maximum for LCD use)
Max Ballast Weight	Up to 1,330 lb / 603.3 kg (150 US gal / 567.8 L of water)
Material	UV-stabilized HDPE or MDPE
Colors	Orange, White, Custom* **Custom colors are available with minimum order quantity*

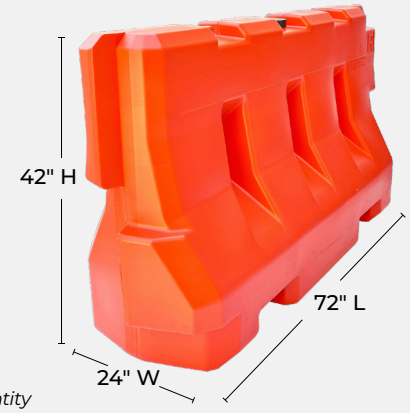

OPTIONAL ACCESSORIES

- OTW Barricade Fence Panel (BFP-63X71-v4)
  - Up to two OTW Solar Type A/C Bi-Directional Barricade Lights (BDL-AC), mounting-bolt spacer is required
  - OTW Airport 360 Solar Hazard Barricade Light (LT-AHL-RD-DM) is compatible only with the rotationally molded OTW42-R and requires an adapter cap (CP-TFC-BK-ADP), and it is currently incompatible with the blow-molded 42”.
- OTW Vehicle & Pedestrian Gate Kits (BFP-VEH-GATE-KIT, BFP-PED-GATE-KIT, BFP-GATE-ADAPTER-KIT)
- Up to 5" x 60" reflective sheeting per side (ACC-RS-5IN-ROLL)
- Screen-printed branding or solid color on OTW Barricade Fence Panel privacy mesh/screen
- Mold-in graphics for barricade branding


OUR PROCUREMENT PROMISE

60-Day Price Lock. We lock in your product and freight pricing for a full 60 days—we absorb the risk so you can plan with 100% certainty.

Fast Quote Guarantee. Time is money. Submit your request by 4:00 PM MT and we will have a formal quote in your inbox the same business day.

Real Time Stock Verification. Inventory moves fast. Call us at 888-363-7740 for an immediate, real-time stock check to ensure your project stays on schedule.

OTW SAFETY

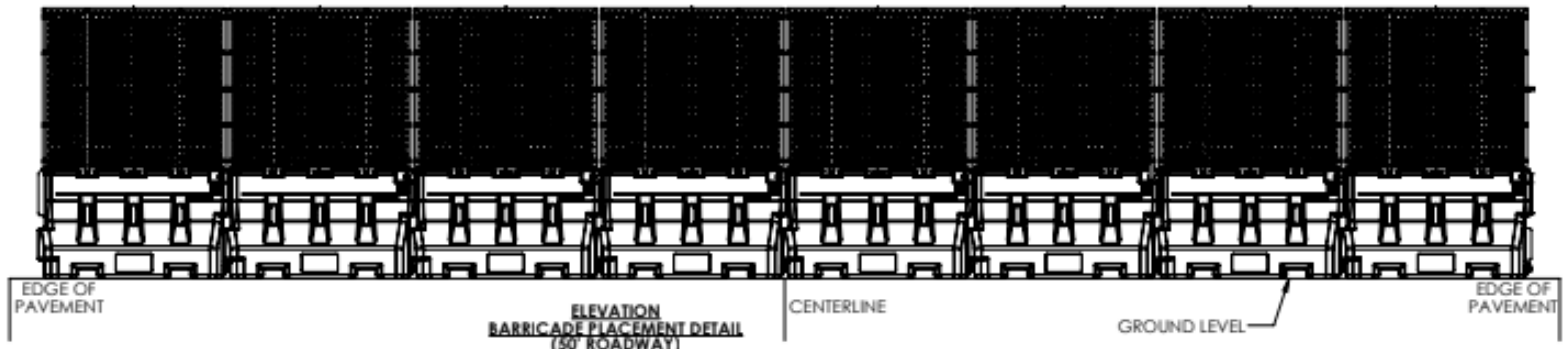


ELEVATION
BARRICADE PLACEMENT DETAIL
(50' ROADWAY)
NO SCALE

WORK ZONE




EXISTING ROADWAY
OPEN TO TRAFFIC


PLAN
BARRICADE PLACEMENT DETAIL
NO SCALE

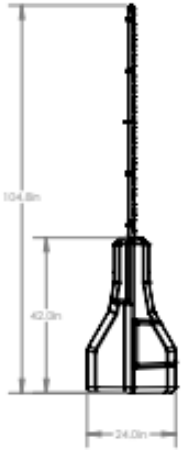

PROFILE
NO SCALE

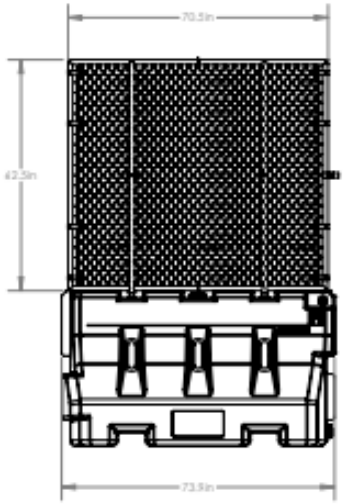

ELEVATION
NO SCALE

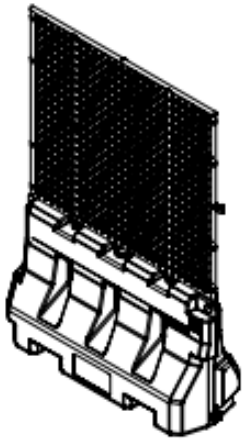

NOTES:

1. BARRICADE CONSTRUCTED OF HIGH-IMPACT, UV-RESISTENT HIGH DENSITY POLYETHYLENE (HDPE)
2. EACH UNIT INCLUDES A GALVANIZED STEEEL BARRICADE FENCE PANEL TO ADD EXTRA SECURITY AND PRIVACY TO JOBSITE
3. WHEN BALLASTED, WILL REMAIN IN PLACE UNAFFECTED BY SUFACE WINDS
4. INTERLOCKING J-HOOK SYSTEM, NO EXTRA HARDWARE REQUIRED
5. NCHRP-350 TEST LEVEL 3 (TL-3) CERTIFIED
6. MEETS FEDERAL HIGHWAY ADMINISTRATION (FHWA) CRASHWORTHINESS STANDARDS
7. BARRICADES SHALL BE PLACED AS SHOWN UNLESS OTHERWISE DIRECTED BY THE RESIDENT ENGINEER
8. ONE-YEAR MANUFACTURING DEFECT WARRANTY

SIZE:	DWG. NO.	REV:
B	OTW42-BFP Work Zone	A

otwsafety.com