

YELLOWGATE UNIVERSAL SAFETY SWING GATE

OVERVIEW & SPECIFICATIONS



OTW SAFETY

otwsafety.com

UNIVERSAL SAFETY SWING GATE

OVERVIEW & SPECIFICATIONS

YellowGate: The Original Safety Swing Gate

YellowGate offers universally adjustable safety swing gates for hazardous working environments. Adjustable lengths and swing directions allow for quick and easy installation in any gated, barrier, or railing needed area. These are just a few key features that make YellowGate a leader in universal safety swing gates.

ADJUSTABLE SWING DIRECTION

Because of YellowGate's universal swing technology, swing gates can be repurposed as often as necessary. While other swing gates require flipping parts or restricting mounting positions, YellowGate's industrial swing gates make it as simple as changing a few bolts for a maximum swing angle of 108 degrees.

SUPERIOR ADJUSTABILITY

With its adjustable length, swing direction, and universal mounting system, the YellowGate industrial safety swing gate can protect passageways with no measuring or mounting types required. The universal gate design makes ordering easy; just order as many as needed without worrying about sizing or compatibility!

VARIABLE WIDTH SWING GATE

With 16" to 36" of coverage, YellowGate's industrial swing gates offer the largest opening distance of any swing gates currently available on the market. Adjusting the width of your safety gate is effortless. Simply slide your gate to the desired width and fasten the adjustment bolts on the top and bottom rails. Note that inline mounting covers openings from 19.625" to 36", while perpendicular mounting covers openings from 16" to 32.625".

UNIVERSAL MOUNT

YellowGate offers easy installation with a universal mount requiring no cutting, welding, or drilling. The gate can be installed on various surfaces using provided tools in parallel or perpendicular positions, meeting diverse installation needs with a single SKU.

PARALLEL MOUNTING


YellowGate provides a flexible gate for parallel mounting, aligning the hinge point and handrail, covering larger openings like walking paths, entryways, and exits.

OUR PROCUREMENT PROMISE

✓ **60-Day Price Lock:** We lock in your product and freight pricing for a full 60 days—we absorb the risk so you can plan with 100% certainty.

✓ **Fast Quote Guarantee:** Time is money on the job site. Submit your request by 4:00 PM MT, and we will have a formal quote in your inbox the same business day.

✓ **Real-Time Stock Verification:** Inventory moves fast. Call us at 888-363-7740 for an immediate, real-time stock check to ensure your project stays on schedule.

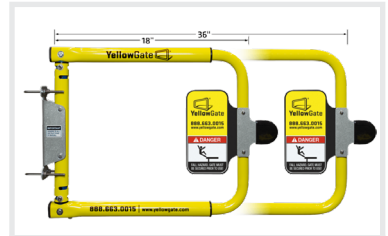

SIZE

Min / Max Length: 16" to 36"
(406mm to 914mm)

COLOR

Powder Coated in Safety Yellow

FEATURES & BENEFITS

- **Closing mechanism:** Malbec Tensioner
- **Mount type:** Universal
 - Mounts anywhere with no additional parts needed
 - Field adjustable with no cutting, welding or drilling
- **Applicable Regulations:** OSHA "1910.23 Guarding Floor & Wall Openings & Holes"
- **Pallet Quantity:** 10

PERPENDICULAR MOUNTING

Perpendicular mounting can be used to restrict ladders and narrow openings by placing the mount and hinge point out-of-line of a passageway. This perpendicular installation can help maximize access width while also minimizing snag potential.

ALL-IN-ONE SETUP

YellowGate includes all necessary components for swing gate setup: stainless steel mounting kit, hardware kit, and tension adjustment tool.